

SOLIS

— THE TOUGHEST —
PERFORMER
« FOR YOUR FIELD »

90
SHUTTLE XL



4 CYLINDER STAGE V
HIGH END TORQUE ENGINE

SYNCHRO SHUTTLE
TRANSMISSION

ADVANCED HYDRAULIC
LIFT CAPACITY

S COMMAND
CENTER

MULTIPLE
TYRE OPTIONS



COST
EFFICIENT
MECHANICAL TRACTORS

MADE OF
REAL
STEEL

STRATEGIC
COLLABORATION
WITH
YANMAR




FEATURES		90 ShuttleXL
ITL ENGINE		
No. of Cylinders / Capacity (cc) / Emissions Level		4/ 4087/ CRDi Stage V
After Treatment System		DOC + DPF + SCR (Ad Blu)
Rated Engine Power (kw/Hp)		67.3/90
Rated Engine Speed		2200
Max. Torque (Nm)		375@1400 Rpm
Aspiration		Turbo Charged
Intercooler		
Air Cleaner		Dual Stage Dry Type
Block Heater		
Updraft Exhaust Pipe		
Downdraft Exhaust Pipe		
Fuel Tank Capacity (L)		110
DEF Tank Capacity (L)		12
TRANSMISSION		
12x12 Synchro Shuttle Transmission (4WD)		
Minimum Forward Speed		1.22kmph
Maximum Forward Speed		35kmph
20x20 Synchro Shuttle Transmission (4WD) with Super Creeper		
Minimum Forward Speed		0.25kmph
Maximum Forward Speed		40kmph
FRONT AXLE		
4WD Front Axle		
Differential Lock		Mechanical
4WD Actuation		Electro Hydraulic
Brake Actuation		Hydraulic Assisted
PTO		
PTO Type		Mechanical
540/540E		
540/1000		
540/Ground Speed		
HYDRAULIC		
Hydraulic Pump Flow (LPM)		65
Draft Control		
Liftomatic System		
Lift Capacity		3000 Kg / 3500 Kg (0)
Linkage Category		II
Self Locking Linkages		
Max. no. of Rear Remotes		2/3 (0)
Max. no. of Mid Remotes		
Mechanical Joystick Control for Mid Mounts with Valves		1 (0)
REAR HITCHES		
E-Mark Swinging Drawbar		
Semi Automatic Ladder Hitch		
Automatic Ladder Hitch		

FEATURES		90 ShuttleXL
Cuna Type Ladder Hitch		
TRAILER BRAKES		
Without Trailer Brakes		
Hydraulic Trailer Brakes		
Dual Line Pneumatic Trailer Brakes		
ELECTRICALS (ROPS/CAB)		
Battery		130AH 800CCA
Alternator		ROPS: 90A / Cab: 120A
Button Operated Battery Cut off Switch, 3 Pinsocket, Seven on Trailer Socket		
OPERATOR ENVIRONMENT		
Suspended Platform (with ROPS)		
Premium Driver Seat		
Tilttable & Telescopic Steering		
Integrated Loader Joystick		
Cabin Air Conditioning (with Cabin)		
DIMENSIONS (ROPS/CAB)		
Wheelbase (mm)		2350
Overall Height (mm)		ROPS: 2500 - 2710 Cab: 2500 - 2700
Overall Width (mm)		ROPS: 2110 - 2200 Cab: 2065 - 2200
Overall Length (mm)		3985-4200
Front Track Width (mm)		1670-1850
Rear Track Width (mm)		1500-1650
Ground Clearance (mm)		405-425
Unladen Mass (Kg)		ROPS: 3720 - 3995 Cab: 3965 - 4245
Tyre Combination		12.4x24 & 18.4x30
OPTIONAL TYRE COMBINATIONS		
Bias Tyres (4WD)		13.6*24 16.9*34
Radial Tyres (4WD)		320/85R24 & 460/85R30 320/70R24 & 480/70R30 360/85R24 & 460/85R30 420/65R24 & 540/65 R34 280/85R24 AGRIMAX RT855 E 115A8/B SPL 420/85R30 AGRIMAX RT855 E 140A8/B SPL

● Standard ○ Optional

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

DEALER STAMP

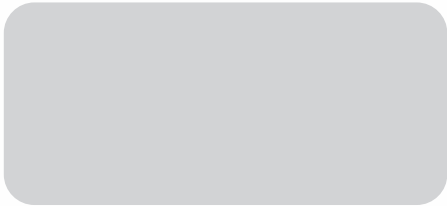

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221
Fax:+91- 01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com