

# RIDGER

## FURROW RIDGER











### SALIENT FEATURES

- Robust Pipe Frame
- Easy to Operate Attachable with 3 Point Linkage
- Easy Furrow width Adjustment
- High Quality Boron Steel Disc

# FURROW RIDGER

Ridger is a primary soil tillage machine which is mounted and trailed from tractor's hydraulic lifting unit and universal three point linkage system. As per crop it helps in making perfect ridge and also helps in uprooting unwanted roots.

## TECHNICAL SPECIFICATIONS

 Model Name	 No. of Bottom	 Length (mm)	 Width (mm)	 Height (mm)	 Furrow to Furrow Distance (mm)	 Furrow Blade Height (mm)	 Tractor (HP)
SL-FR5	5 Bottom	3175	965	1270	660	305	75
SL-FR7	7 Bottom	965	4495				90



ROBUST PIPE FRAME




HEAVY DUTY POINTED FURROW



EASY TO OPERATE ATTACHABLE WITH 3 POINT LINKAGE



EASY FURROW WIDTH ADJUSTMENT

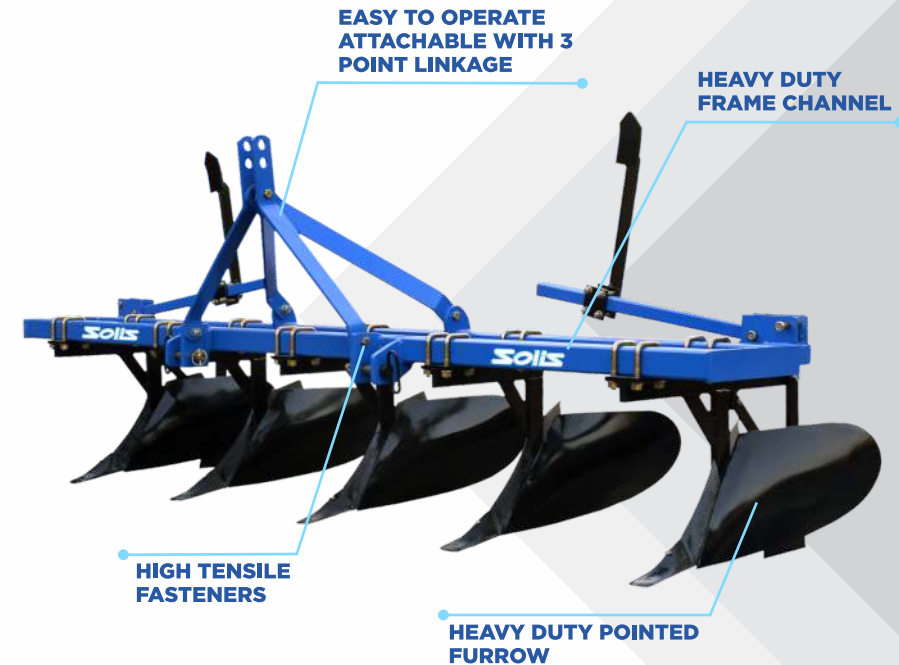

## INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)  
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221  
 Fax: +91 1882 302293 | Email: [exports@sonalika.com](mailto:exports@sonalika.com) | URL: [www.solistractors.com](http://www.solistractors.com)

Auth. Dealer