

— THE TOUGHEST —
PERFORMER
« FOR YOUR FIELD »

SOILS
C48

**UNLOCK NEW POSSIBILITIES,
ELEVATE PRODUCTIVITY**



BEST IN INDUSTRY
5
YEARS
WARRANTY

— CELEBRATING —
1,400,000
TRACTORS
— GLOBALLY —

— COST —
EFFICIENT
MECHANICAL TRACTORS

— MADE OF —
**REAL
STEEL**

— STRATEGIC —
COLLABORATION
WITH
YANMAR

S-BOOST HYDRAULICS

Discover the power and convenience of Solis C48, designed to excel in the field. This tractor boasts heavy-duty hydraulics that enables smooth and efficient operations, giving farmers the edge they need for productive tasks. The self-locking TPL ensures secure and hassle-free attachment of implements, while the integrated loader controller valve and pipe routing streamline loader operations. With Solis C48, farmers can rely on high-performance tractors that tackle demanding agricultural tasks effortlessly.



**3DA AUXILIARY
HYDRAULIC
CIRCUIT**



**1450 KG LIFTING
CAPACITY**



**CAT-II THREE POINT
LINKAGE**



TIMELESS DESIGN

Solis C48 sets a new standard in the world of agriculture with its aerodynamic and modern appearance, making it stand out from the crowd. More than looks, this exceptional machine comes pre-equipped with advanced safety features, prioritizing the well-being of those who operate it.



**AERODYNAMIC
BONNET**



**TWIN PROJECTOR
HEAD LAMPS**



**SHEET METAL
HOOD**

IMPRESSIVE ADVANCE MULTIPLE HITCHES OPTIONS

Solis C48 is a versatile powerhouse designed for efficiency and convenience. Equipped with the innovative multiple hitches options, this tractor offers unparalleled stability and precision during farming operations. Additionally, its semi-automatic hitch system streamlines the attachment process, saving you valuable time. Plus, with multiple tire options like Agri, Turf, and Industrial, it's easy to customize your tractor to tackle any farming task.



**LIGHT
WEIGHT
TRACTOR**




**MULTI TYRE
OPTION**



**QUICK
ATTACH
LOADER**

HIGH PERFORMANCE POWERFUL ENGINE

Introducing the Solis C48 tractor - a true powerhouse on the farm. Equipped with a cutting-edge High-Torque 4-Cylinder Stage-V Natural Aspirated Engine, this tractor delivers unbeatable power for all your agricultural needs. Tackle any task quickly and efficiently, making the Solis C48 the top choice for farmers seeking reliable performance and outstanding capabilities. Say goodbye to limitations and experience a new era of productivity with the Solis C48.

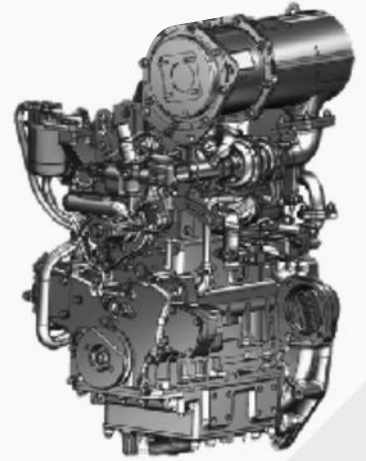


**4-CYLINDER
NATURAL
ASPIRATED ENGINE**



**HIGH END
TORQUE OF
146.2 Nm**



**DRY TYPE
AIR CLEANER**

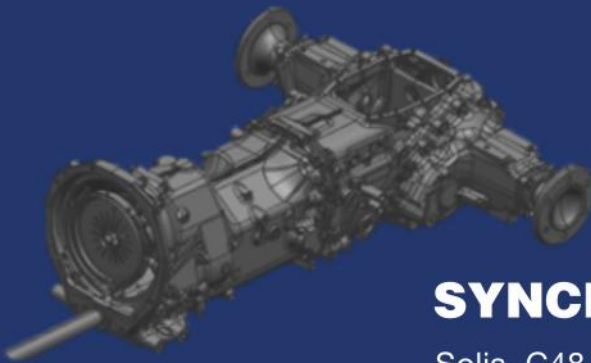

INNOVATIVE SYNCHROMESH TRANSMISSION

Solis C48 brings the perfect blend of technology and adaptability to you. Experience the convenience of the next-gen synchromesh transmission, offering an impressive 12 forward and 12 reverse speeds. Designed for narrow operations, its 1400mm overall width allows you to maneuver effortlessly in tight spaces.



**12 FORWARD +
12 REVERSE
TRANSMISSION**



**SYNCHROMESH
TRANSMISSION**



**OPTIMIZED
SPEED RANGE**

CUTTING-EDGE S-COMMAND CENTRE

Unleash the full potential of your farming operations with the Solis C48. Embodying innovation and functionality, this tractor is equipped with the advanced S-Command Centre, providing operators with tiltable power steering for precision handling. On top of that, experience utmost ease on extended hours with the floor mat and comfortable operator seat.



**POWER
STEERING**



**COMFORTABLE
SEAT**



**WIDER
PLATFORM**



C48

FEATURES	C48
ENGINE	
Engine Type	STAGE V , Yanmar Make
HP Category	46
No. of Cylinders	4
Aspiration	Natural Aspirated
Cubic Capacity (cc)	2,190
Rated RPM	2800
Cold Start	Yes
Air Cleaner	Dry, 5 inch
Max Torque (Nm)	146.2
Exhaust	Downdraft
TRANSMISSION	
Drive	4WD
Gearbox	12F+12R Synchro
Front Axle	4WD
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	25
Minimum Speed (Km/Hr)	1.58
BRAKES	
Brakes	Mechanical
Type of Actuation	Mechanical
Parking Brake	Independent Type
DIFFERENTIAL LOCK	
Differential Lock	Mechanical, Foot Operated
PTO	
PTO (RPM)	540/750
PTO (Actuation)	Electro Hydraulic
STEERING	
Steering	Power
ELECTRICAL	
Battery	80Ah
Alternator	12V, 55A
HYDRAULICS	
Hydraulic Lifting Capacity (Kg)	1450
3 Point Linkage	CAT-II
Stay Bars	Adjustable
Auxiliary Hydraulic Circuit	3DA
Lift Rods	Both Side Adjustable
Litre Per Minute (LPM)	30

FEATURES	C48
CAPACITY (LTRS)(+/-5%)	
Fuel Tank (Ltr.)	60
TURNING RADIUS	
Without Brakes (mm)	2700
TYRE	
Front	260/70 R16 RT 765
Rear	360/70 R24 RT 765
DIMENSION (+/-5%) (4WD/2WD)	
Weight (Kg)	1870
Overall Length (mm)	3470
Overall Width (mm)	1400 with Agri Tyre
Overall Height (mm) up to ROPS	2575
Wheel Base (mm)	1900
Min. Ground Clearance (mm)	360
Front Track (mm)	1130
Rear Track (mm)	1122
OTHERS	
Trailer Hitch - Option 1	E Mark Swinging Bar
Trailer Hitch - Option 2	E Mark Trailer Hitch
Front Tow Hook	Yes
OPTIONAL TYRES	
Tyres	8-18 6PR,13.6-24 TR 135 8PR 8-18, 13.6-26 9.5-16,13.6-26 8-18 TR171 8PR TT,13.6-26 TR 171 8PR TT Front : 240/70 R16, Rear : 360/70 R24 Front : 250/80 R16, Rear : 400/80 R24 Front : 280/70 R18, Rear : 420/70R24 Front : 8-18, Rear : 12.4-24 Front : 7x16, Rear : 11.2-24 Front : 31X15.5-15 Turf, Rear : 44 x 18-20 Front : 280/70-R16, Rear : 420/70R24 Front : 12.5/70-16, Rear : 19.5L-24 Front : 7x16, Rear : 12.4-24 Front : 12-16.5, Rear : 17.5L-24 Front : 10-16.5, Rear : 17.5L-24

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

DEALER STAMP

