

CULTIVATOR

DOUBLE SPRING LOADED SERIES












SALIENT FEATURES

- Robust frame
- Heavy duty forged tyne
- Heavy duty springs to absorb sudden impact
- Superior powder coated paint

DOUBLE SPRING LOADED SERIES

Solis Cultivators helps in proper soil manipulation to prepare smooth & loose seedbed before planting. It loosens & aerates the soil to a depth of 9 inches in most effective and economical way.

TECHNICAL SPECIFICATIONS

		 Model	 Spring (mm)	 Tyne (mm)	 Shovels (mm)	 Width (mm)	 Length (mm)	 Height (mm)	 Weight (Kg. Approx.)	 Tractor Power (HP)		
Double Spring Loaded Series	Mini	SL-CL-MS5	9.5 WD / 44 OD/27 Coil	22x19 (Forged)	8(EN-45)	1205	834	930	140	20-24		
		SL-CL-MS7				1640			170	26-30		
	Medium	SL-CL-M9	9.2 WD / 48 OD/27 Coil	25x19 (Forged)		2134	698	533	180	45+		
		SL-CL-M11				2590			220	50+		
	Heavy Duty	SL-CL-MH9	10 WD / 50 OD / 28.5 Coil	50x25 (Forged)		2039	878	1157	290	45+		
		SL-CL-MH11				2492			370	55+		
		SL-CL-MH13				2945			440	65+		
		SL-CL-MH15				3520			520	75+		
		SL-CL-HF15				3520			915	1170	540	75+
		SL-CL-HF17				3970			650	90+		



HEAVY DUTY SPRING




SUPERIOR POWDER COATED PAINT PREVENT FROM RUST



BORON STEEL SHOVELS DESIGNED FOR TOUGH OPERATIONS



HEAVY DUTY FRAME

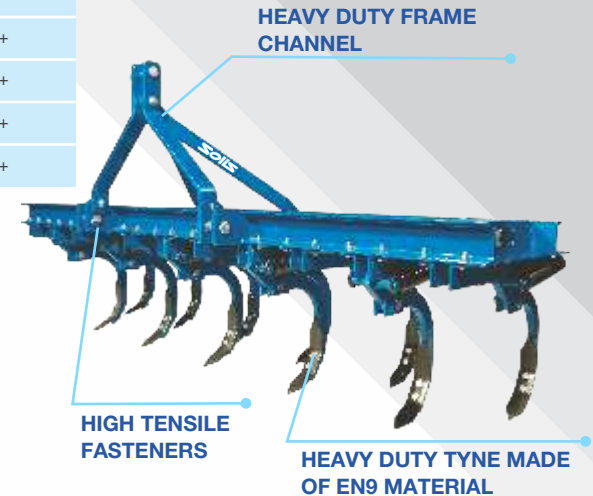

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221

Fax: +91- 01882-522222 | Email: info@solis.com | URL: www.solistractors.com

Auth. Dealer