

ROTAVATOR

ALPHA

SALIENT FEATURES


- International quality boron steel blades
- High tensile fasteners
- Flexible spring damper assembly
- Heavy duty gear box
- Powder coated paint
- Ensures smooth operation in different soil types
- Provides ease of working in interculture operations
- Effective for puddling due to better churning of soil

ALPHA SERIES

Rotavator is secondary tool used in preparing Seed Beds, Stubby ploughing in specially farming vineyard gardens.

TECHNICAL SPECIFICATIONS

		f Model Name	Size (In Feet)	Tillage Width (mm)	Gear Box	C Side Transmission	L Type of Blade	No. of Blades	kg Weight (Kg. Approx)	Tractor Power (HP)
	Alfa Series	SL AS5	5	1625	Multi Speed	Gear Drive	С & L Туре	36	430	45-55
		SL AS5.5	5.5	1800				36	445	50-60
		SL AS6	6	1880				42	460	60-70
		SL AS7	7	2130				48	490	70-80
		SL AS8	8	2335				54	545	75-85
		SL AS9	9	2820				60	580	70-80
		SL AS10	10	3040				66	650	80-90

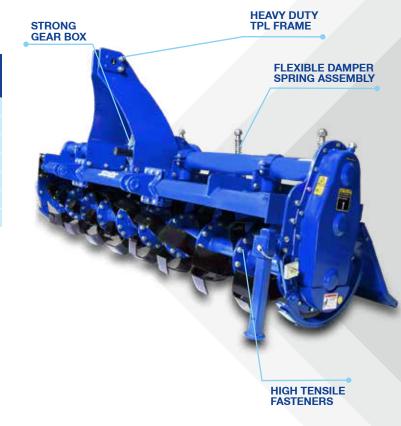



HEAVY DUTY 2 SPEED GEARBOX



OIL IMMERSED

DUO CONE MECHANICAL SEAL SUITABLE FOR **DRY & WET LANDS**



SIDE BEARINGS



STRUCTURE WITH 7 MM THICK BLADE



INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India) Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221 Fax:+91- 01882-522222 | Email: info@solis.com | URL: www.solistractors.com

Auth. Dealer