

— THE TOUGHEST —
PERFORMER
— FOR YOUR FIELD —

Solis
20+


**UNMATCHED
COMFORT**
FOR UNSTOPPABLE PRODUCTIVITY



SIDE SHIFT GEAR



ENGINE
MITSUBISHI 3 CYLINDER
(WATER COOLED)














TRANSMISSION
NEXT GENERATION 6F+2R
TRANSMISSION



HYDRAULICS
600 KG LIFTING CAPACITY




FEATURES	20+
ENGINE	
Engine Type	Mitsubishi 3 Cylinder (Water Cooled)
HP Category	20
No. of Cylinders	3
Aspiration	Naturally
Cubic Capacity (cc)	953
Rated RPM	2700
Air Cleaner	Dry with Clogging Sensor
Cold Start	Standard
Max. Torque (Nm)	52
Exhaust	Silencer in the Engine Compartment, Downward Discharge
TRANSMISSION	
Drive	4WD
Clutch	Single Clutch
Gearbox	6 Forward + 2 Reverse
Front Axle	4WD
Transmission	Sliding Mesh
Gear Shifting	Side Shift
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	15.1@2900
Minimum Speed (Km/Hr)	1.36@rated
BRAKES	
Brakes	Dry Drum Brake/ Opt. OIB
Type of Actuation	Mechanical
Parking Brake	Independent
DIFFERENTIAL LOCK	
Differential lock	Yes, Foot Operated
PTO	
PTO (RPM)	540, 1000
PTO (Actuation)	Mechanical
STEERING	
Steering	Mechanical
ELECTRICAL	
Battery	12 V, 60 Ah
Type of Actuation	12V, 42 A
Parking Brake	Standard
HYDRAULICS	
3 Point Linkage	Cat 1 - N
Stay Bars	Anchor Chain
Auxiliary Hydraulic Circuit	1DA
Lift Rods	Standard
Lifting Capacity (Kg)	600
Litre Per Minute (LPM)	13.3

FEATURES			
SAFETY SWITCH 			
PTO Safety	Standard		
Neutral Safety Switch	Standard		
Clutch Safety Switch	Standard		
CAPACITY (LITRE) (+/-5%) 			
Fuel Tank (Ltr.)	26		
TURNING RADIUS 			
Without Brakes (m)	3.2 (RHS), 3.3 (LHS)		
TYRE (STANDARD) 			
Front	5.00-12		
Rear	8.00-18		
DIMENSION & WEIGHT (+/-5%) 			
Weight (kg)	970		
Wheel Base (mm)	1425		
Total Length (mm)	2735		
Total Width (mm)	960 - 1065		
Height (mm) Up to ROPS	2260		
Min. Ground Clearance (mm)	200		
Front Track (mm)	810		
Rear Track (mm)	810		
OTHERS 			
Fuel Indicator Gauge	Standard		
Front Tow Hook	Standard		
Front & Rear Weights with Std. Ballast	Front Weights 30 Kg - 2 x 15 Kg		
Trailer Hitch	Drawbar / Optional Towbar		
ROPS	Yes		
Cabin Option	Yes		
TYRES			
			
Radial Agri: Front Rear	Turf: Front Rear	Ind: Front Rear	Galaxy Pro Front Rear
6.5/80-12 280/70 R18	23x8.50-12 33x15.5-16.5	23x8.50-12 33x15.5-16.5	220/55R12 280/70R16
Front Loader		YES optional	

**Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

DEALER STAMP

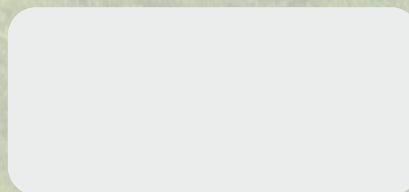

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221
 Fax: +91- 01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com