

— THE TOUGHEST —  
**PERFORMER**  
— FOR YOUR FIELD —

**Solis**

**ORCHARD & VINEYARD**  
*Specialist*



**N75**

# ORCHARD & VINEYARD Specialist




FEATURES	N75
<b>ENGINE</b>	
No. of cylinders / capacity (cc) / emissions level	4/ 4088/ Stage V
After Treatment System	DOC + DPF
Rated Engine Power (kw/Hp)	54.83/ 73.47
Rated Engine Speed	2000
Max. Torque (Nm)	340Nm @ 1400 Rpm
Aspiration	Turbo charged with Intercooler
Air Cleaner	Dual Stage Dry Type
Block Heater	○
Downdraft Exhaust Pipe	●
Fuel Tank Capacity (l)	80
<b>TRANSMISSION</b>	
12x12 Synchro Shuttle transmission	●
Minimum/Maximum Speed	0.45 kmph/ 30 Kmph
<b>FRONT AXLE</b>	
4WD Front Axle	●
Differential Lock	Mechanical
4WD Actuation	Mechanical 4WD
Brake Actuation	Hydraulic Assisted Brakes
<b>PTO</b>	
PTO Type	Mechanical
540/540E	●
<b>HYDRAULIC</b>	
Hydraulic pump flow (lpm)	45
Open centre mechanical draft control	●
Liftomatic system	●
Lift Capacity (kg)	2500
Linkage Category	II
Self Locking TPL Linkages	○
Max. no. of rear remotes	2/3 (O)
<b>REAR HITCHES</b>	
E-Marked Swinging Bar	●
CBM Ladder Hitch	○
Cuna (X Type & Y Type) Hitch	○
<b>TRAILER BRAKES</b>	
Without Trailer Brakes	●
Hydraulic Trailer Brakes	○

FEATURES	N75
<b>ELECTRICALS (ROPS/CAB)</b>	
Battery	130AH 800CCA
Alternator	120A
Button Operated Battery Cut off Switch, 3 Pin socket, Seven pin Trailer Socket	●
<b>OPERATOR ENVIRONMENT</b>	
Suspended platform (with ROPS)	●
Normal Driver seat w/o Armrest	●
Tiltable & Telescopic Steering	●
Integrated Loader Joystick	○
Front Mud Guards	○
Ballast Weights (31*6) Kg	○
Ballast Rear Weights (30*2) Kg	○
Cabin Air Conditioning (With HVAC)	○
CAT IV cabin	○
<b>DIMENSIONS (ROPS/CAB)</b>	
Wheelbase (mm)	2310
Overall Length (mm)	4040 - 4280
Overall Width (mm)	1400 - 1410
Overall Height (mm)*	2330
Front Track Width (mm)	1150 - 1210
Rear Track Width (mm)	1000 - 1110
Ground Clearance (mm)	260
Unladen Mass (Kg)	3295
<b>STANDARD TYRES (ROPS/CAB)</b>	
Bias Tyres (4WD)	8.00-18 & 14.9-24
<b>OPTIONAL TYRES (ROPS/CAB)</b>	
Radial Tyres (4WD)	210/95R18 & 360/70R28
	280/70R18 & 360/70R28
	260/70R16 & 360/70R24
	280/70R18 & 420/70R24
	280/70R18 & 380/85R24
	8x18 * 13.6X24

● Standard ○ Optional

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

DEALER STAMP

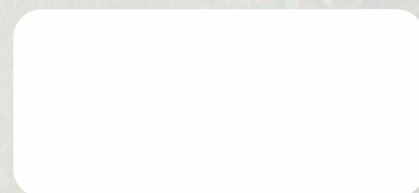

## INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221

Fax:+91- 01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com