


SOLIS

— THE TOUGHEST —
PERFORMER
« FOR YOUR FIELD »

26

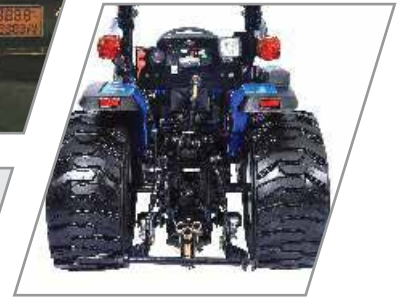

RELIABLE MECHANICAL
TRACTOR

POWER PACKED
ENGINE

TWIN PROJECTOR
HEADLAMPS

AGRI, IND. & TURF
TYRE OPTION

REINFORCED SAFETY
FEATURES



**COST
EFFICIENT**
MECHANICAL TRACTORS

MADE OF
**REAL
STEEL**

**STRATEGIC
COLLABORATION
WITH
YANMAR**













26

Solis



FEATURES 26	
ENGINE	
Engine Type	3 Cylinder Diesel Engine
HP Category	26
No. of Cylinders	3
Aspiration	Naturally
Cubic Capacity (cc)	1319
Rated RPM	2500
Air Cleaner	Dry with Clogging Sensor
Cold Start	Standard
Max. Torque (Nm)	76.3
Exhaust	Silencer in The Engine Compartment, Downward Discharge
TRANSMISSION	
Gear Shifting	Center shift (std.), Side shift (opt.)
Drive	4WD
Clutch	Single Clutch
Gearbox	6 Forward + 2 Reverse (Side Shift Gear)
Front Axle	Heavy Duty
Transmission	Sliding Mesh
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	16.2@2815 fly up
Minimum Speed (Km/Hr)	1.64@2500 rated
BRAKES	
Brakes	Oil Bath Brake
Type of Actuation	Mechanical
Parking Brake	Independent
DIFFERENTIAL LOCK	
Differential lock	Yes, Foot Operated
PTO	
PTO (RPM)	540, 1000
PTO (Actuation)	Mechanical
STEERING	
Steering	Power Steering
ELECTRICAL	
Battery	12 V, 65 Ah
Type of Actuation	12V, 36 A
Parking Brake	Standard
HYDRAULICS	
3 Point Linkage	Cat 1 - N
Stay Bars	Anchor Chain
Auxiliary Hydraulic Circuit	1DA
Lift Rods	Standard
Lifting Capacity (Kg)	775
Litre Per Minute (LPM)	13.5

FEATURES		26	
SAFETY SWITCH 			
PTO Safety		Standard	
Neutral Safety Switch		Standard	
Clutch Safety Switch		Standard	
CAPACITY (LITRE) (+/-5%) 			
Fuel Tank (Ltr.)		28	
TURNING RADIUS 			
Without Brakes (m)		3.18 (RHS), 3.25 (LHS)	
TYRE (STANDARD) 			
Front		6.00-12	
Rear		8.30-20	
DIMENSION & WEIGHT (+/-5%) 			
Weight (kg)		1070, 1265 with Cabin	
Wheel Base (mm)		1560	
Total Length (mm)		2760	
Total Width (mm)		1075 (max) - 1055 (min)	
Height (mm) Up to ROPS		1955	
Min. Ground Clearance (mm)		240	
Front Track (mm)		885	
Rear Track (mm)		835	
OTHERS 			
Fuel Indicator Gauge		Standard	
Front Tow Hook		Standard	
Front & Rear Weights with Std. Ballast		Front weights - 2 x 15 Kg	
Trailer Hitch		1. E-marked swinging drawbar 2. Clevis Hitch 3. Semi-Automatic hitch	
ROPS		Yes	
Cabin Option		Yes	
TYRES			
			
Radial Agri: Front Rear 6.5/80-12 280/70 R18		Turf: Front Rear 23x8.50-12 33x15.5-16.5	
			
Ind: Front Rear 23x8.50-12 33x15.5-16.5		Galaxy Pro 220/55R12 280/70R16	
Heavy Duty Loader		YES optional	

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

DEALER STAMP



INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221
Fax: +91- 01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com