




FEATURES	L60
ENGINE	
HP Category	60 HP
No. of Cylinder	3
Aspiration	Naturally Aspirated
Cubic Capacity	3530
Rated RPM	2100
Air Cleaner	Dry Type
Max Torque (Nm)	242@1400
Exhaust	Downdraft
TRANSMISSION	
Drive	4WD
Type	Synchromesh Shuttle
Gearbox	12+12
Front Axle	4WD
SPEED (FORWARD)	
Maximum Speed (km/hr)	28.11
Minimum Speed (km/hr)	0.5
BRAKES	
Brakes	Oil Immersed
Type of Actuation	Mechanical
Parking Brake	Latch Type
Differential Lock	Foot Operated
PTO	
PTO (RPM)	Read – 540, 540E
PTO (Actuation)	Mechanical
STEERING	
Steering	Power Steering
ELECTRICALS	
Battery	12V, 110AH
Alternator	12V, 90 Amp
HYDRAULICS	
3 Point Linkage	Cat 2
Control Type	ADDC

FEATURES	L60
EQRL	Std.
Lifting Capacity (Kg)	2500
Stay Bars	Anchor Chain
Auxiliary Hydraulic Circuit	2DA Std., 3DA (Optional)
Lift Rods	Yes
LPM (Litre per minute)	45
CAPACITY (LITRES ±6%)	
Fuel Tank	65
TYRE	
Front	280/70R18
Rear	340/85R28
OVERALL DIMENSIONS	
Weight (Kg)	2830
Wheel Base (mm)	2160
Total Length (mm)	4075
Total Width (mm)	1715
Height (mm) up to ROPS	2300
Height (mm) up to Driver Seat	1170
Height (mm) up to Fender	1330
Front Track (mm)	1310
Rear Track (mm)	1370
Ground Clearance (mm)	275
Turning Radius (m)	4.5
OPTIONAL FEATURES	
Trailer Hitch - Option 1	Clevis Hitch
Front Toe Hook	Yes, Available
3 Point Linkage Type	Self Locking Linkage
OPTIONAL TYRES	
Option 1	Front : 280/70R18, Rear : 420/70R24
Option 2	Front : 260/70R16, Rear : 360/70R24
Option 3	Front : 280/70R18, Rear : 360/70R28
Option 4	Front : 280/70R18, Rear : 380/70R28
Option 5	Front : 280/70R18, Rear : 380/85R28

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

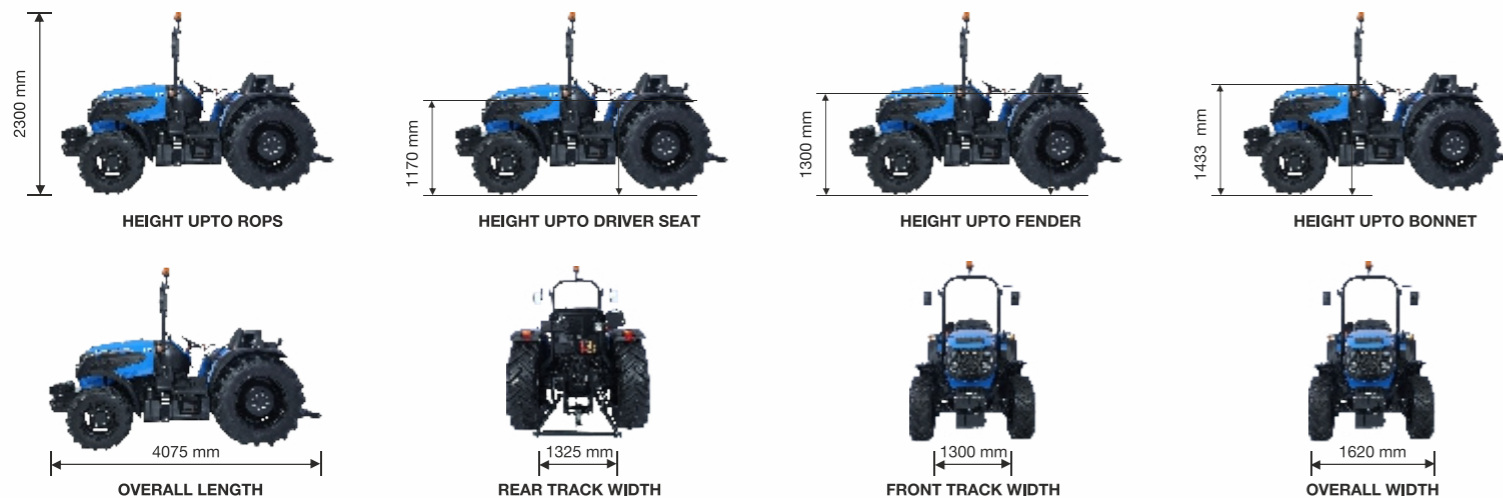

THE PERFECT FARMING COMPANION FOR ORCHARDS & VINEYARDS

INTRODUCING SOLIS L60 CHAMPION

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221
 Fax: +91- 01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com



www.solistractors.com





NAVIGATE NARROW SPACES EFFORTLESSLY

Engineered for precision in vineyards and orchards, Solis L60 delivers unmatched manoeuvrability with its lesser width of 1300mm. The foldable mid ROPS and low profile height of 1300mm ensure easy navigation in tight spaces while maintaining top-tier performance.



FOLDABLE MID ROPS



LESSER WIDTH 1300 MM



LOW PROFILE HEIGHT 1300 MM UP TO FENDER



WORK IN COMFORT WITH POWER STEERING

Equipped with a tiltable and telescopic power steering system, this machine offers maximum comfort and flexibility in steering control. The spacious, expansive workspace ensures operators have all the room they need to work efficiently and comfortably for long hours.



POWER STEERING



COMFORTABLE SEAT



WIDER PLATFORM

POWER & EFFICIENCY PERFECTLY BALANCED WITH STAGE-V ENGINE



Solis L60 has a durable 3.5L, 3-cylinder engine with mechanized fuel injections, fulfilling Stage-V emission standards. Delivering a high-end torque of 242 Nm and 60 HP guarantees top-class performance in all applications. With the optional cold country engine oil, your machine is ready for any climate.



3.5L 3 CYLINDER STAGE-V ENGINE



HIGH END TORQUE OF 242 Nm



DRY TYPE AIR CLEANER

COMMAND HEAVY LOADS WITH 2500 KG LIFTING POWER



This tractor's hydraulic system is built for heavy-duty operations. Equipped with CAT II three-point linkage and an impressive 2500 kg lift capacity, it ensures smooth, precise control and allows you to tackle any job with ease. A high flow rate of 45 LPM combined with 90% hydraulic pump efficiency ensures smooth, precise control.



2DA (STD), 3DA (OPTIONAL) AUXILIARY HYDRAULIC CIRCUIT



2500KG LIFTING CAPACITY



CAT II THREE POINT LINKAGE



EQRL SWITCH QUICK LOWERING & RAISING OF THE LIFT




MASTER THE FIELD WITH ADVANCED CONTROL AT YOUR FINGERTIPS

L60 has advanced transmission and offers 12 forward and 12 reverse gear options, powered by a synchro shuttle system. With a max speed of 30 kmph and a reliable 4WD version, you'll experience seamless gear shifts and unmatched performance on any terrain. Whether on agri-bias or radial tyres, you're equipped for every challenge.



12F & 12R GEAR SPEED WITH SYNCHRO SHUTTLE



4WD FRONT AXLE



UNBEATABLE STRENGTH WITH HEAVY DUTY FRONT AXLE

Featuring a balanced steering system and maintenance-free sealed axle, L60 is designed for heavy-duty tasks. With more articulation and less mechanical loss, the strengthened front axle delivers better productivity and long-lasting reliability, making tough jobs easier.



HIGH PERFORMANCE HD AXLE



BALANCE STEERING



LESS MECHANICAL LOSSES