

DISCHARRROW

MOUNTED OFFSET



SALIENT FEATURES


- Heavy duty disc to absorb sudden impact
- Sealed bearing increases life & reduces maintenance
- Heavy duty reinforced pipe frame
- Robust bearing hub mechanism & bearings
- Superior powder coated paint

MOUNTED OFFSET

Disc harrow is used to till the soil where crops are to be planted. It is also used to chop up unwanted weeds or crop remainders. The discs are also offset so that they are not parallel with the overall direction of the implement. This arrangement ensures that the discs will repeatedly slice any ground to which they are applied, in order to optimize the result. The concavity of the discs as well as their offset angle causes them to loosen and lift the soil that they cut.

TECHNICAL SPECIFICATIONS

Model Name	Frame (mm)	Gang Bolt /Axle Type (mm)	No. of Disc	Type of Disc	Disc Diameter (mm)	Width of cut (mm)	Disc Spacing (mm)	Bearing Hubs	Weight (Kg. approx)	Tractor Power (HP)
SL- DH 10 M	Angle 65x8	28.5	10	Notched disc Front Gang & Plain Disc in Rear Gang	455	1065	225	4	205	20-26
SL-DH 12	75x10 Angle Frame with 100x50 Front Channel	31.5 (Solid Sq. Rod)	12		1370-1420	228	390		30-40	
SL-DH 14			14		1585-1635	228	430		40-50	
SL-DH 16			16		1798-1852	228	6	500	50-60	
SL-DH 18			18		2018-2068	228	575	60+		
SL-DH 20			20		2235-2285	228	615	75+		
SL-DH 24			24		2668-2718	228	8	731	90+	

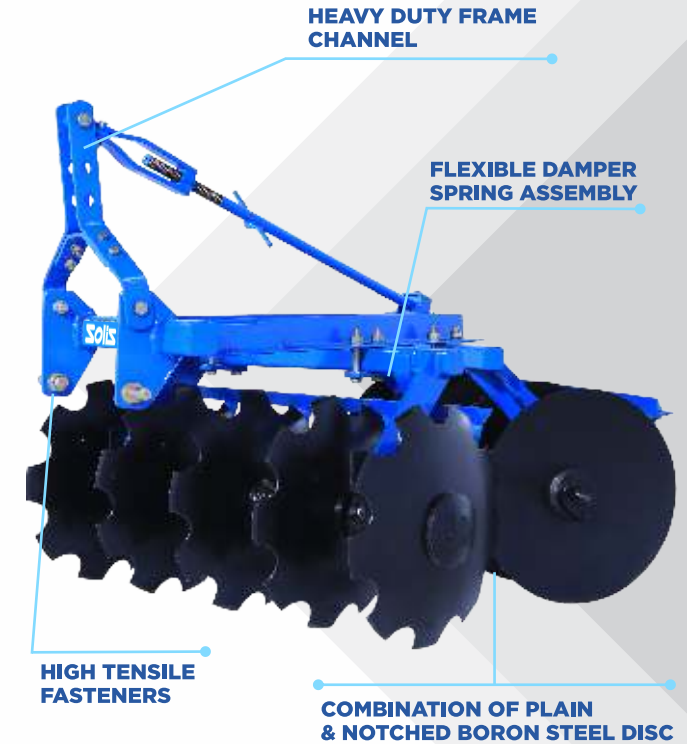

COMBINATION OF PLAIN & NOTCHED BORON STEEL DISC



HIGH QUALITY BORON STEEL DISC



USED FOR CHOPPING UP UNWANTED WEEDS OR CROP RESIDUE

Solis

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
 Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.solistractors.com

Auth. Dealer